

WOOD INSERTS BY



REDISCOVER FIRE



WELCOME HOME.

Isn't this more like it?

Home should be a place you long for. A place you dream of after a hard day's work.

Hard work inspired the IronStrike brand. The IronStrike name signifies a product that is made to perform, built to last a lifetime and as efficient as you are. It's our way of making life simpler and a lot more enjoyable. Because coming home should be the easy part.

So go ahead—make yourself comfortable. You've earned it.



Montlake™ 230 shown with Brushed Nickel door trim and cast-iron top.









A SMART TRANSFORMATION.

How do you take your existing fireplace from neglected to much-needed?


Replace it with a wood-burning insert from IronStrike™. Each one is

EPA-certified, so change can feel good - in more ways than one.

GO AHEAD. CHANGE FOR THE WARMER.

Legacy™ C260 insert shown with 24-K gold-plated Traditional door, 24-K gold-plated surround trim and gold-plated surround screws.

THERMAL FIN TECHNOLOGY (TFT™)

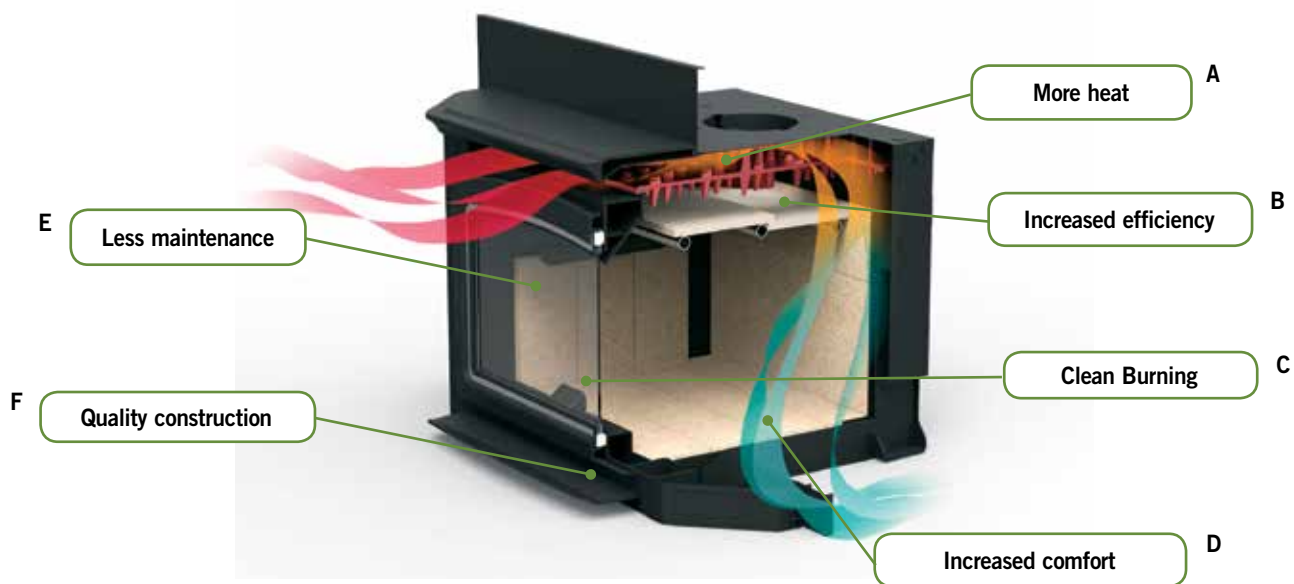

A. More Heat – heat exchanger provides 32% more surface area than standard stove designs.

B. Increased Efficiency – ceramic baffle holds heat in the firebox longer, resulting in high efficiency.

C. Clean Burning – air booster maintains a clean, efficient burn while improving combustion efficiency.

D. Increased Comfort – standard variable-speed blower helps heat larger spaces.

E. Less Maintenance – airwash system forces high-velocity air across the glass, keeping it clean.

F. Quality Construction – heavy-gauge steel assembled and welded by our experienced craftsmen equals industry-leading quality and years of dependable performance.

MONTLAKE 300

Incorporates Thermal Fin Technology™ to produce a highly efficient and clean way to heat with wood that has all the warm ambiance of a traditional fireplace.

LOG LENGTH: 21" max.

HEATING CAPACITY: 2,000 - 3,000 square feet

MAXIMUM OUTPUT: 100,000 BTUs/hour

HEAT TRANSFER EFFICIENCY: 82%

Montlake™ 300 comes standard with two variable speed blowers with auto and manual controls.

Montlake™ 300 insert shown with Brushed Nickel door trim and cast iron top.



MONTLAKE 230

Stylish and sensible, the Montlake™ 230 fireplace insert converts an existing wood burning fireplace to an efficient clean burning heater.

LOG LENGTH: 18" max.

HEATING CAPACITY: 1,200 – 2,200 square feet

MAXIMUM OUTPUT: 76,000 BTUs/hour

HEAT TRANSFER EFFICIENCY: 84%

Montlake™ 230 comes standard variable speed blower with auto and manual control

Montlake™ 230 insert shown with Brushed Nickel door trim and cast iron top.



COUNTRY COLLECTION

CANYON C310 X-LARGE

When you need to heat a large area and want long burn times (7–12 hrs.), the Canyon™ C310 is the right choice.

LOG LENGTH: 22-1/2" Max.

HEATING CAPACITY: 1,600 - 3,000 square feet

MAXIMUM OUTPUT: 84,500 BTUs/hour

HEAT TRANSFER EFFICIENCY: 77.9%

Canyon™ C310 shown with 24K gold-plated Traditional door, black blower and gold surround trim



LEGACY C260 LARGE

The Legacy™ C260 is the ideal choice for serious heating needs. Add an optional 225-CFM blower for more even heat in your home. Available with a Traditional door in a variety of finishes.

LOG LENGTH: 22-1/2" max.

HEATING CAPACITY: 1,200 – 2,200 square feet

MAXIMUM OUTPUT: 79,000 BTUs/hour

HEAT TRANSFER EFFICIENCY: 79.2%

Legacy™ C260 shown with brushed nickel-plated Traditional door and blower, nickel surround trim and nickel-plated surround screws.

PERFORMER C210 MEDIUM

For moderate heating needs, the Performer™ C210 is the smart and efficient choice. Available with your choice of an Arch or Traditional door in a variety of finishes.

LOG LENGTH: 20" max.

HEATING CAPACITY: 1,000 – 1,800 square feet

MAXIMUM OUTPUT: 76,000 BTUs/hour

HEAT TRANSFER EFFICIENCY: 85%

Performer™ C210 shown with gold-plated surround trim and gold-plated surround screws.



STRIKER C160 SMALL

The Striker™ C160 is one of the cleanest and most efficient non-catalytic wood inserts ever made, and is available with your choice of an Arch or Traditional door in a variety of finishes.

LOG LENGTH: 18" max.

HEATING CAPACITY: 600 – 1,300 square feet

MAXIMUM OUTPUT: 68,000 BTUs/hour

HEAT TRANSFER EFFICIENCY: 78.6%

Striker™ C160 shown with black Arch door.

CUSTOMIZE YOUR INSERT

MONTLAKE™ OPTIONAL ACCESSORIES

DOOR TRIM

Choose the door style and finish that is right for you.



Black



Nickel



Brushed Nickel

TOP WARMING SURFACE

Choose between two stylish warming surfaces: classic cast iron or solid, heavy-gauge steel.



Cast iron top



Steel top

CANYON™, LEGACY™, PERFORMER™, & STRIKER™ OPTIONAL ACCESSORIES

FACE STYLE & FINISH

Choose the door style and finish that is right for you.

Traditional door




Available on all models.

-  Brushed Nickel
-  Nickel-Plated
-  Standard Black
-  24K Gold-Plated
-  Brushed Gold-Plated

Arch door



Available on Striker™ C160 and Performer™ C210 only.

-  Brushed Nickel
-  Nickel-Plated
-  Standard Black
-  24K Gold-Plated
-  Brushed Gold-Plated

SURROUND & TRIM

The surround is required and is used to cover the surrounding fireplace opening for a finished appearance.



Black



24K gold



Nickel






Black surround trim screws are standard. Optional gold- or nickel-plated screws are available.

BLOWER

All Country™ Collection fireplace inserts may be fitted with an optional variable-speed blower (310 & 260 inserts–225-CFM blower/210 & 160 inserts–160-CFM blower).



-  Standard Black
-  24K Gold-Plated
-  Nickel-Plated

*Square-foot heating capacities and burn times are approximations only. Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of wood used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

SPECIFICATIONS

DIMENSIONS

	STRIKER™ C160	PERFORMER™ C210	LEGACY™ C260	CANYON™ C310	MONTLAKE™ 230	MONTLAKE™ 300
Front Width	23-1/8"	25"	28"	28"	36-5/8"	38-1/8"
Rear Width (Rear Taper Width)	23-1/2" (21-1/2")*	25-1/2" (23")*	28-1/2**	28-1/2**	24-1/2" (22-1/2")	27-14" (25-1/4")
Front Height	18-1/2"	18"	20-1/2"	20-1/2"	21-3/4"	23"
Rear Height	19-1/4"	19"	22-1/2"	22-1/2"	21-1/4"	22-5/8"
Depth into Fireplace	12-1/2"	12-1/4"	14-1/2"	14-1/2"	15-1/2"	15-1/4"
Flue Diameter **	6"	6"	6" or 8"	6" or 8"	6"	6"
X = Depth onto Hearth	4-1/2"	9"	6-1/2"	9"	7-1/2"	10-5/8"
Approximate Weight	320 lbs.	400 lbs.	493 lbs.	547 lbs.	390 lbs.	428 lbs.

** Consult your dealer or professional installer for recommended chimney sizes for your application. C260 and C310 require 6" reducer for use with 6" chimney.

* Leveling nuts extend outside this dimension.

CLEARANCES

		STRIKER™ C160	PERFORMER™ C210	LEGACY™ C260	CANYON™ C310	MONTLAKE™ 230	MONTLAKE™ 300
A = Insert Top to Combustible Mantel	US	24"	24"	30"	30"	15"	26"
	Canada	26"	32"	30"	31"	15"	26"
B = Insert Top to Top Facing	US	15"	18"	20"	20"	13"	24"
	Canada	18"	26"	20"	23"	13"	24"
C = Insert Side to Side Wall		20"	18"	20"	20"	4"	8"
D = Insert Side to Side Facing		12"	15"	15"	15"	1"	8"
E = Hearth in Front of Insert †		18"	18"	22"	24"	16"	18"
G = Minimum Mantel Height from Bottom of Insert		43"	42-1/8"	50-1/2"	50-1/2"	36-3/4"	48-3/4"
H = Hearth Side to Door Opening		4.5"	8"	8"	8"	N/A	N/A



† In some cases the hearth depth in front of inset may be reduced by 2" for every 2" the hearth is raised. Check the owners manual for details.

SURROUND SIZING




	STRIKER™ C160	PERFORMER™ C210	LEGACY™ C260	CANYON™ C310	MONTLAKE™ 230	MONTLAKE™ 300
Surround Size	26-1/2"H x 40"W	26-1/2"H x 40"W	29"H x 40"W	29"H x 40"W	26-1/2"H x 41"W	29"H x 42-1/2"W
	26-1/2"H x 48"W	26-1/2"H x 48"W	29"H x 48"W	29"H x 48"W	26-1/2"H x 48"W	29"H x 49-1/2"W
	30-1/2"H x 40"W	30-1/2"H x 40"W	33"H x 40"W	33"H x 40"W	31"H x 41"W	33"H x 42-1/2"W
	30-1/2"H x 48"W	30-1/2"H x 48"W	33"H x 48"H	33"H x 48"H	31"H x 48"W	33"H x 49-1/2"W
Able to be Trimmed	N/A	N/A	N/A	N/A	33"H x 48"W	34"H x 50"W

FIREPLACE SIZING

		STRIKER™ C160		PERFORMER™ C210		LEGACY™ C260	CANYON™ C310	MONTLAKE™ 230		MONTLAKE™ 300
		MASONRY FIREPLACE	ZC FIREPLACE	MASONRY FIREPLACE	ZC FIREPLACE	MASONRY FIREPLACE	MASONRY FIREPLACE	MASONRY FIREPLACE	ZC FIREPLACE	MASONRY FIREPLACE
I	Minimum Depth	12-3/4"	12-3/4"	12-1/2"	12-1/2"	14-3/4"	14-3/4"	15-1/2"	15-1/2"	16-1/2"
J	Minimum Height	19-1/2"	21"	19-1/4"	21"	22-3/4"	22-3/4"	21-1/2"	21-1/2"	23-1/2"
K	Minimum Width	25-1/2"	36"	26"	36"	30-1/2"	30-1/2"	25"	36"	29-1/2"
L	Minimum Rear Width	23-1/2"	23-1/2"	25"	25"	30-1/2"	30-1/2"	22-1/2"	22-1/2"	27-1/4"
M	Maximum Lintel Depth	4-3/4"	4-3/4"	4-1/2"	4-1/2"	5-1/4"	5-3/4"	5-3/8"	5-3/8"	5-3/8"

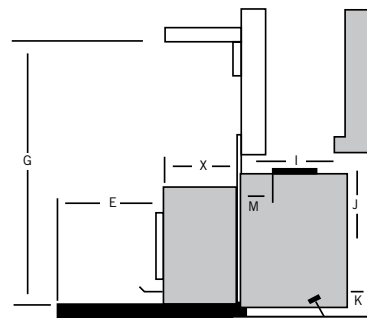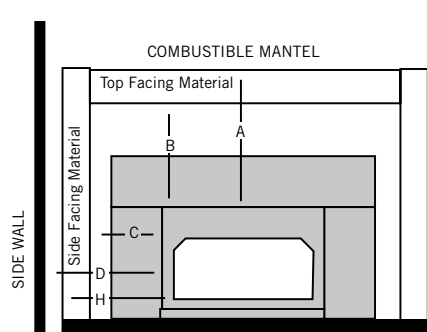

*Illustrations apply to Striker™ C160, Performer™ C210, Legacy™ C260, & Canyon™ C310

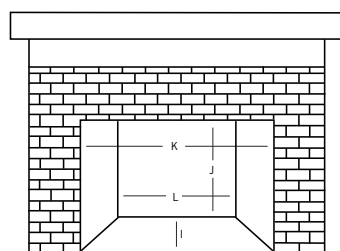

*Illustrations apply to Montlake™

**SEEKING THE
RIGHT INSERT
FOR THE
JOB? YOU'RE
GETTING
WARMER.**





© 2015 Innovative Hearth Products

785490M 05/15

Visit us online



IronStrike.us.com

